


TOILET LEAK DETECTION


Leaks always get larger and cost you more the longer you wait.



LEAK TEST

- 1 Wait 5-10 minutes after the last flush cycle to perform the leak test.
- 2 Remove the cover. Gently drop one Leak Detective tablet into tank. Do not flush.
- 3 Wait 15-20 minutes.
- 4 If blue dye color appears in bowl, you have a leak. (Don't worry, it won't stain the bowl).

SOURCES OF THE LEAK MAY BE:

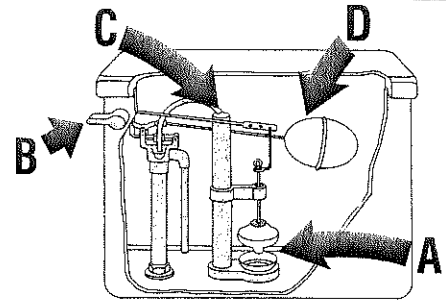

- 1 The flapper valve and valve seat (A) have deteriorated or corroded.
- 2 The flushing arm and lift chain (B) are not working properly.
- 3 The water level in the tank is too high and spills into the overflow tube (C).
- 4 The float rod, ballcock and/or float ball (D) are corroded.

Replacement parts are available at hardware and plumbing supply stores or consult your local plumbing professional.